



Bervic Australia

by Accentric Group

Unit 5, 36 Koornang Road, Scoresby, Victoria 3179 Australia


E-mail: sales@AccentricGroup.com.au

www.AccentricGroup.com.au


For the isolation of service loads during replacements and repairs use

BERVIC Live Line and Earthing Clamps

Part No.	Clamp Type	Description
BST		• A heavy duty fully shrouded clamp with T-handle • The patented shrouded spindle is fully protected to prevent thread damage, dirt and airborne pollutants interfering with the function of the clamp • Main cable capacity: $\varnothing$ 5–19mm • Split bolt capacity: up to 2 tap conductors $\varnothing$ 5–8mm
BT		• A heavy duty clamp with T-handle • Main cable capacity: $\varnothing$ 5–19mm • Split bolt capacity: tap conductor $\varnothing$ 5–8mm
BL12		• A heavy duty clamp with T-handle • Main cable capacity: $\varnothing$ 5–19mm • $\varnothing$ 12mm hole in body to take cable lug and bolt
BP		• A heavy duty clamp with screw driver handle • Main cable capacity: $\varnothing$ 5–19mm • Split bolt capacity: tap conductor $\varnothing$ 5–8mm

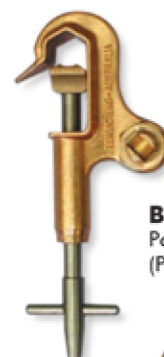

BST Clamp
Patent protected
(Patent No. 699099)



BT Clamp



BP Clamp

- All Bervic Australia clamps are made from a forged brass body
- The stainless steel spindle has a 12mm thread to ensure a strong clamping force and to prevent the clamp from becoming loose due to vibration
- The clamping block is also constructed from brass to ensure maximum conductivity
- All Bervic Australia clamps have been tested to AS1154.1-1985 by a NATA approved laboratory
- All clamps are proudly designed and developed in Australia